

Package Contents



LED Video Light ×1



Mounting Clip ×1



Color Filter ×6



Charging Cable ×1




Diffuser ×1



Cold Shoe Adapter ×1


Product Illustration

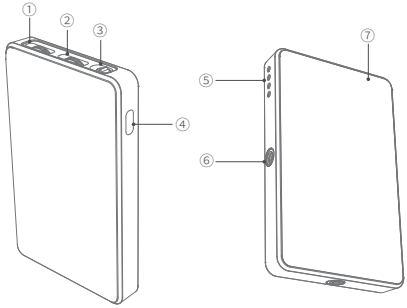


① Color Temperature Dial
② Brightness Dial
③ Power Switch
④ USB C Charging Port
⑤ Battery Indicator
⑥ 1/4" Thread
⑦ Diffuser

Installation Steps


EN



1. Place the color filter inside the diffuser, then align the emitting surface of the light with the holes of the diffuser.



2. Screw the 1/4" screw on the mounting clip into the thread at the bottom of the light, and tighten it by rotating.





3. Clip the mounting clip onto a phone, computer, or other device, and rotate the knob to adjust the light angles.

EN

Installation Steps

4. Screw the cold shoe adapter into the 1/4" thread of the light and secure it by rotating the screw, then insert the cold shoe into the top of the camera.





Battery Warning

1. Do not disassemble, modify, or attempt to repair the built-in battery without authorization. Any unauthorized operation may result in battery leakage, overheating, fire, or explosion.
2. Do not use non-original or uncertified chargers to avoid risks such as overcharging or short circuits.
3. If abnormal charging speeds or indicator lights are observed, immediately stop charging and contact customer service.
4. Do not place the product near flammable or explosive materials.

Precautions

1. Do not drop, bump, or subject the product to strong impacts.
2. Do not look directly at the light during use, as it may cause vision damage.
3. Do not use the product in rain or humid environments.
4. Turn off the power when not in use.
5. Store the product in a ventilated, dry place away from heat sources and magnetic fields when not used for long periods.
6. Do not heat, disassemble, puncture, or damage the device or battery, nor dispose of them in a fire. Avoid prolonged exposure to direct sunlight or extended charging, as it may cause battery damage or melting.

Specifications

Model	BL120B
Number of LEDs	120
Battery Capacity	3.7V 3000mAh 11.1Wh
Input Voltage	DC 5V/2A
Max Power	7W
Color Rendering Index	95
Maximum Illumination	570lux/0.5m
Color Temperature	2500–9000K
Battery Life at Max Power	≈140 minutes
Dimensions (excluding accessories)	4.2" × 2.6" × 0.6"/106 × 66 × 16mm