Getting Started

For your safety and the proper operation of this product, please read this manual thoroughly before use and keep it in a safe and handy place for future reference.

Product Overview

The BL60C mini RGBWW LED video light features an integrated 2000mAh rechargeable battery and 60 premium LEDs, with CCT, HSI, and FX modes for creative light effects.

Battery Safety Precautions


1. Do not attempt to dissemble, modify, and repair the battery. In doing so, the battery may leak, overheat, burn, or explode.


2. Always charge the battery with the original or certified charger to prevent overcharging, short circuits, and other risks.

3. If you notice an unusual charging rate and indicator status, please stop charging the battery immediately and contact our customer service.

4. Keep the product away from inflammables and explosives.

Product Illustration

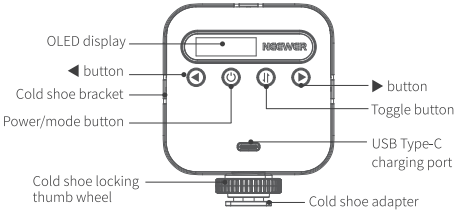

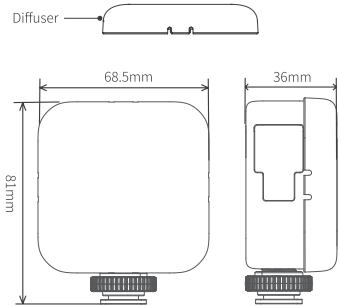

EN


EN

Installation Guide

1. Using the diffuser


When mounting accessories on cold shoes.

① When not using the diffuser, accessories can be directly inserted into the cold shoe and locked by their respective locking thumb wheels.
② When using the diffuser, it is recommended stacking only BL60C lights since other models may affect the proper use of the diffuser.
③ It is not recommended to use the diffuser if cold shoes are in use.



2. Using the cold shoes


① Attaching to the camera.

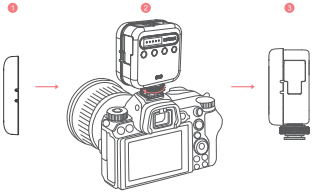

Remove the diffuser, insert the BL60C light into camera's shoe mount and tighten the thumb wheel, then replace the diffuser.


Installation Guide

② Removing from the camera.

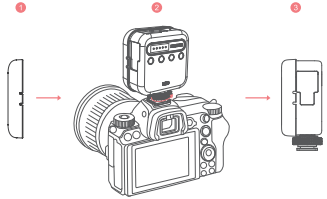

Remove the diffuser, loosen the thumb wheel, then remove the BL60C light from the camera.

Directions for Use



- Charging

Connect to a 5V/2A power source with a USB Type-C cable.
"▮▮" flashes during charging.
"▮▮" stays lit after fully charged.


Directions for Use



- Powering on/off


① Press and hold "⏻" to power BL60C on and off.

② Press "⏻" once to switch between the light modes.



- Brightness adjustment

In any light mode, press "⇅" button once. When ">" points at the brightness value, press "◀" or "▶" for adjustment.



- Color temperature adjustment

① Press "⏻" button once to switch to CCT mode.

② Press "⇅" button once and when ">" points at the color temperature value, press "◀" or "▶" for adjustment.


Directions for Use



- Hue adjustment

① Press "⏻" button once to switch to HSI mode.


② Press "⇅" button once and when ">" points at "**H**", press "◀" or "▶" for hue adjustment.



- Saturation adjustment

① Press "⏻" button once to switch to HSI mode.

② Press "⇅" button once and when ">" points at "**S**", press "◀" or "▶" for saturation adjustment.



- Scene selection

① Press "⏻" button once to switch to FX mode.

② Press "⇅" button once and when ">" points at the scene number, press "◀" or "▶" to select scenes.

Directions for Use

Special Effects Mode

1	2	3	4	5
Lightning	Paparazzi	Defective Bulb	Explosion	Welding
6	7	8	9	10
CCT Flash	Hue Flash	CCT Pulse	Hue Pulse	Cop Car
11	12	13	14	15
Candlelight	Hue Loop	CCT Loop	INT Loop	TV Screen
16	17	18		
Fireworks	Party	Music Sync		

Directions for Use

- This product is not waterproof or dustproof.
- This product is a precision instrument and should not be dropped or subjected to physical shock.
- Keep ventilation holes unblocked to prevent overheating.
- Do not stare directly at the light source. Doing so could cause damage to your eyesight.
- Keep this product away from inflammable or volatile solutions to avoid fire and smoking.

Directions for Use

- Disconnect the power after each use.
- Allow the product to completely cool before storing it in a case.
- Clean the product with a soft, dry cloth. For stubborn stains, use neutral detergent and wipe dry with a soft cloth.
- Do not use strong cleaning agents, such as diluent, gasoline, and alcohol, to clean this product to avoid damage to the finish.

Specifications

Model	BL60C
Number of LEDs	60 (20 warm, 20 cold, 20 RGB)
Power	5W
Max Illuminance	450lux/0.5m
Light Modes	CCT/HSI/FX
Color Temperature	2500K~9000K
CRI	97
Dimming Range	0%~100%
Battery Type	3.7V 2000mAh 7.4Wh Li-ion
Hue	0~360°
Input	5V 2A
Saturation	0~100
Number of Scenes	18
Weight	128g
Operating Temperature	0°C~40°C
Dimensions	81×68.5×36mm

* Specifications and design are subject to change without prior notice.