
## Product Overview

Thank you for your purchase of this NEEWER® product!

This product is a handheld continuous light, more lightweight and more portable than COB video lights of the same type and power. Key features include a high level of brightness, a wide color temperature range, and various special effect scenes. It supports App wireless control and offers two power supply options: Type-C or via a mains power adapter for easy operation.


## Package Contents




Standard Reflector×1




HS60B Bi Color LED Video Light×1



Silicone Softbox ×1



Power cord×1





Power Adapter×1




User Manual×1

## Product Illustration

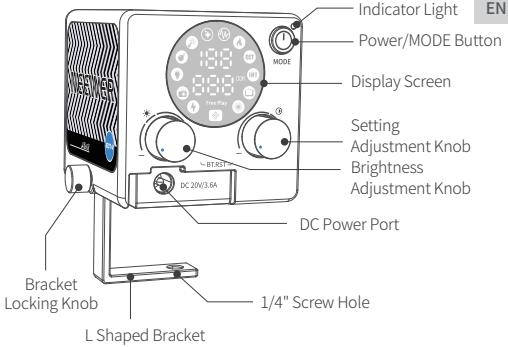

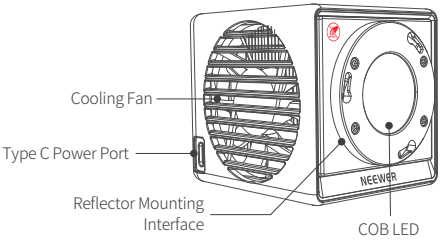




EN


EN

## Installation Instructions

1. Installing/Detaching the Reflector




① Align the reflector with the mounting interface, and rotate it clockwise until you hear a sound to successfully install it.



② Press down on the reflector, and rotate it counterclockwise to remove.


2.Mounting the Softbox




Mount the silicone softbox on the reflector for a soft and omnidirectional light effect.

## Installation Instructions

3. Mounting on A Tripod



① Loosen the bracket locking knob, adjust the L shaped bracket to the required angle, and then tighten the knob.




② Mount the bracket to a tripod's 1/4" screw via its 1/4" screw hole.

## Using the product

1. Powering via USB


Use a USB C cable to power the device connecting to the power port and a power source.



※ Type C USB cable needs to be purchased separately.


2. DC Adapter Power Supply

Before powering the device, please rotate the bracket in the direction shown in the diagram to avoid the bracket blocking the DC power port.
Connect the power adapter to the DC power port and a power outlet to power the device.




## Using the product

EN





● Power On/Off

Turn on the device by long pressing the ⏻ button. The indicator light will turn green, indicating that the device is powered on. Long press again to power off.




● Brightness Adjustment

Rotate the brightness adjustment knob counterclockwise for a 1% decrease in brightness; rotate it clockwise for a 1% increase in brightness.





● Color Temperature Adjustment

Short press the **MODE** button to switch to CCT mode. Rotate the setting adjustment knob to adjust the color temperature from 2700K to 6500K.


EN

## Using the product




● Select Special Effect Scenes

Short press the **MODE** button to switch to FX mode. Rotate the setting adjustment knob to select different lighting scenes.




● Bluetooth Reset

Long press the brightness adjustment knob and the setting adjustment together knob for 5 seconds to reset the Bluetooth function.

### Scene modes




## Mobile App Control




The ring light can be controlled using the "NEEWER" APP via a Bluetooth connection. Bluetooth is connected when the " " indicator stops flashing.

※ For detailed information, please scan the QR code on the "APP Introduction" page of the APP prompt card.

## Notes

1. Avoid dropping or subjecting the product to strong impacts.
2. Do not stare directly at the light during use to prevent eye damage.
3. Keep the product away from flammable materials.
4. Avoid using the product in humid environments and do not submerge in water.
5. Turn off the power when not in use.
6. Store in a well ventilated, dry area and away from heat and magnetic fields when not in use.
7. Allow the product to cool before placing it in the packaging to prevent LED damage from residual heat.

## Warnings

| Fault Codes | Descriptions |
|---|---|
| E1 | Fan Malfunction |
| E2 | NTC Malfunction |
| E3 | High Temperature Warning |
| E4 | Low Pressure Protection |
| E5 | High Pressure Protection |

## Specifications

EN

| | |
|---|---|
| Model | HS60B |
| LED Type | Bi color COB lamp |
| Output Powe | 60W |
| Operating Voltage /Current | DC：20V/3.6A<br>PD：5V/2A，9V/2A，15V/3A，20V/2.25A，20V/5A |
| Input Power | 10W/18W/45W/65W |
| Maximum Illuminance (with reflector) | 35000lx（1m） |
| Color Rendering Index (CRI) | CRI 97+ |
| Brightness Adjustment | 0%-100% |
| Color Temperature Adjustment | 2700-6500K |
| Number of Scenes | 12 |
| APP Control Method | Bluetooth |
| Power Supply | PD Adapter, Power Adapter |
| Frequency Range | 2402MHz~2480MHz |
| Maximum radio-frequency power | 0.03dBi |
| Operating Environment Temperature | -10°C to 40°C |
| Dimensions (with reflector) | 96x96x145mm |
| Weight (with reflector) | 320g |