
Product Illustration


EN

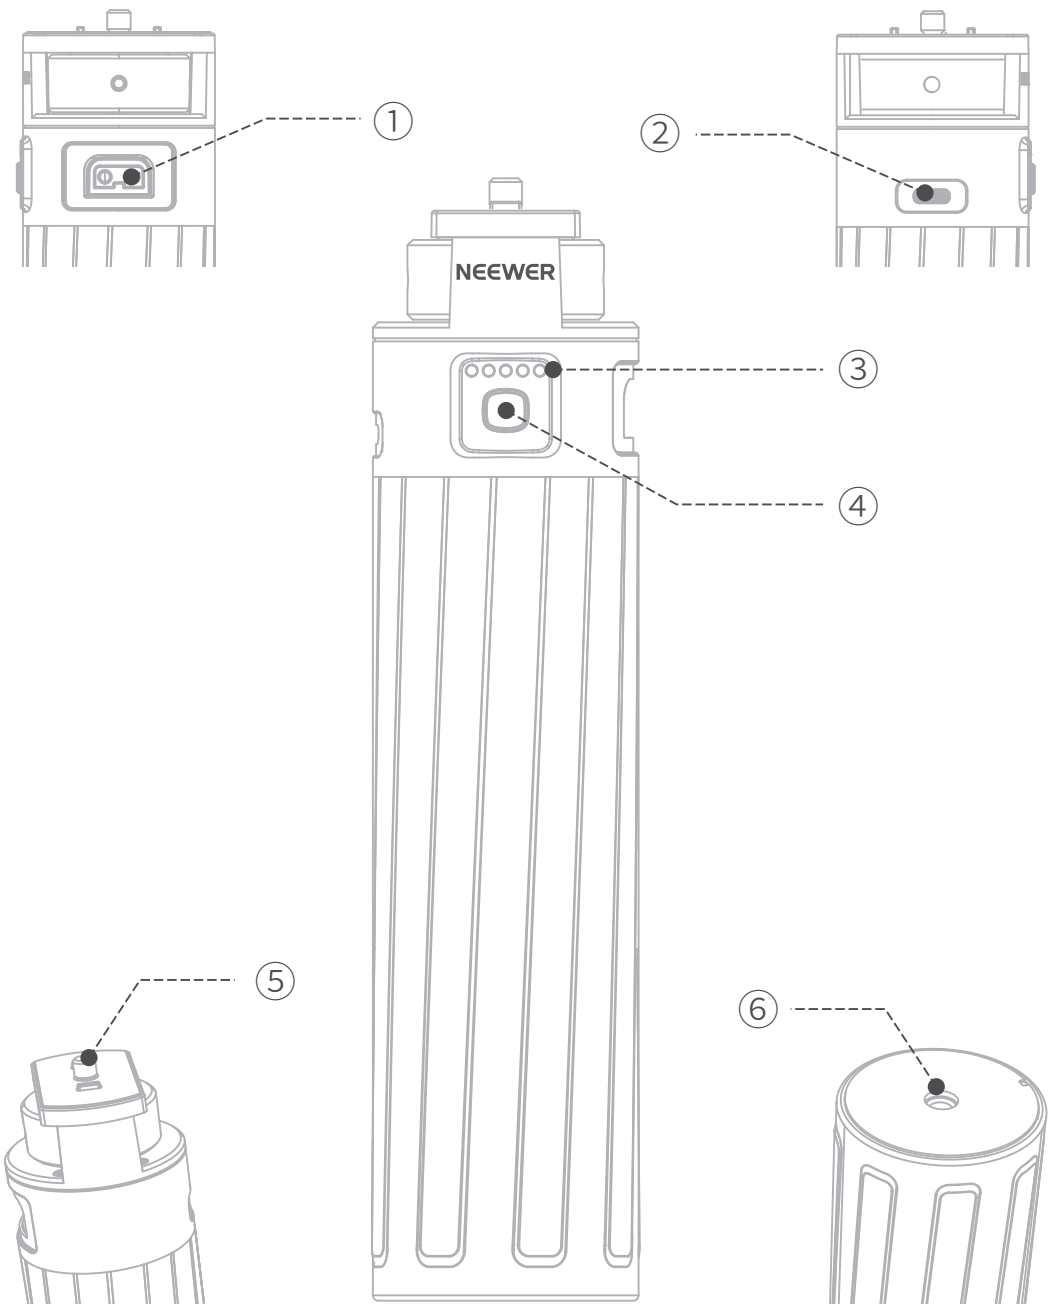


① D-TAP Input/Output
② USB-C Input/Output
③ Power Indicator Light
④ Power On/Off
⑤ 1/4" Screw
⑥ 1/4" Screw Hole

Using the Product

EN

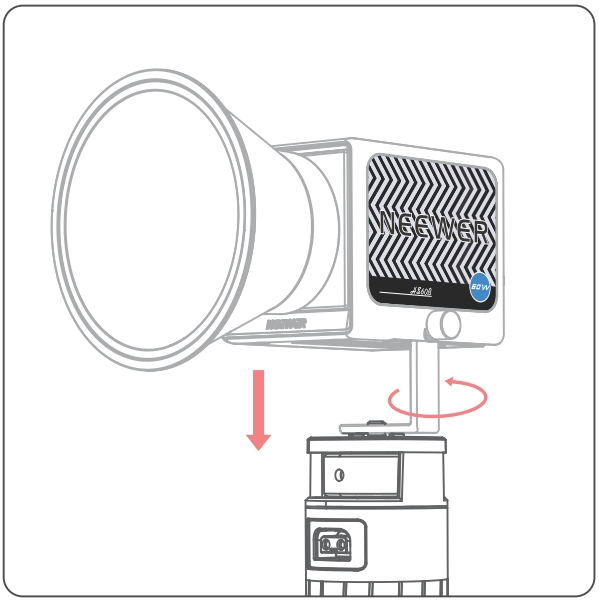


① Attach the video light to the battery grip via the 1/4" screw hole.

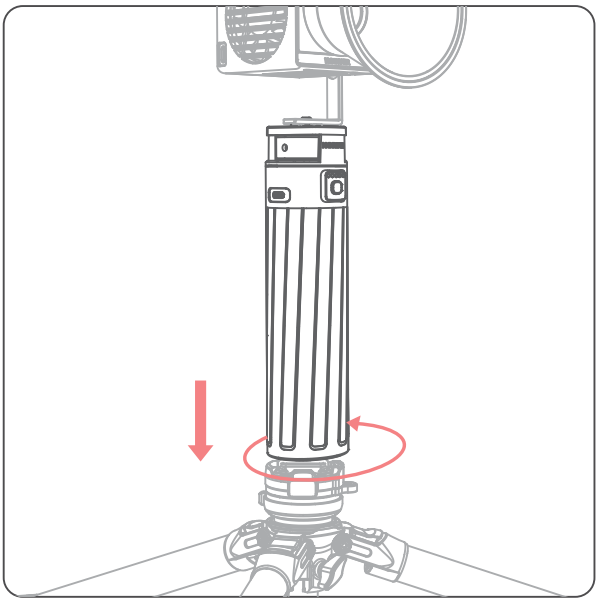


② Mount the battery grip onto the tripod.

EN

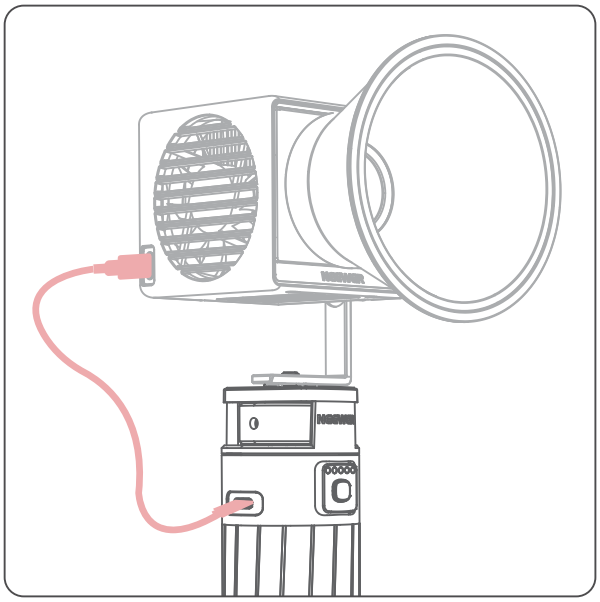

③ **Connect the charging cable.**

Use the included power cable to connect the light to the battery grip.

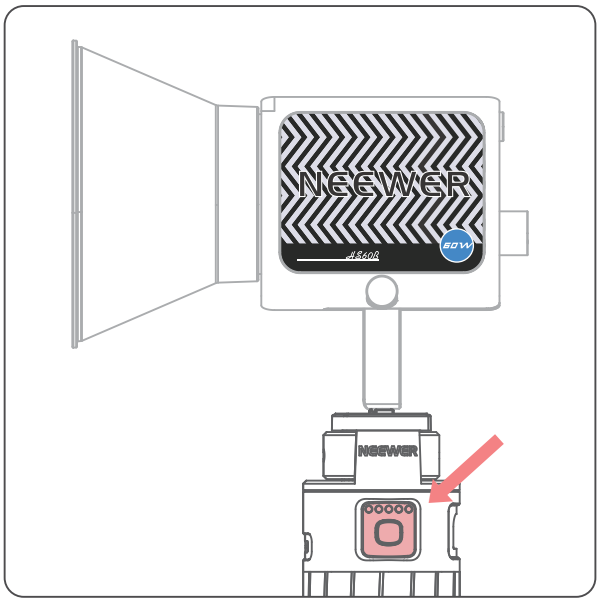

④ Press the button to power on the light.

Battery Warning

EN

1. Do not disassemble, modify, or attempt to repair the battery; unauthorized actions may lead to leakage, overheating, fire, or explosion.
2. Only use original or certified chargers to avoid risks of overcharging and short circuits.
3. If the charging speed is unusually fast or slow, or the indicator light flickers, stop charging immediately and contact customer service.
4. Keep the product away from flammable or explosive materials.

Battery Safety Guidelines

1. Avoid short circuiting the terminals.
2. The battery is not waterproof; keep it away from moisture and water.
3. Store the battery out of reach of children.
4. Charge the battery for no more than 24 hours; only use the original charger.
5. Recharge if left unused for over 3 months.
6. Keep the battery away from fire.
7. Batteries should be disposed of in accordance with government regulations.
8. Prior to storing away the batteries for an extended period, charge the battery to about 60%.
9. Store in a half charged state, wrapped in non conductive material, and place it in a cool, dry place.
10. Do not use the battery while charging.
11. The battery is equipped with over temperature protection feature; if the battery reaches 55°C, allow it to cool down before using it again.

Specifications

EN

Model	PH99E
USB-C Input	20V/3.25A (Max)
USB-C Output	5V/3A，9V/3A，12V/3A， 15V/3A，20V/5A
Capacity	14.54V/6800mAh/99Wh
D-TAP Input	16.8V
D-TAP Output	14.4V/10A(Max)
Charging Time	Approx. 2 hours
Operating Temperature	-20°C ~ +50°C
Dimensions	50×50×212mm
Weight	610g